


Functionality, quality and profitability

The full rotary offset press of variable format, specially designed for the pharmaceutical market business forms and security, admitting low-grammage and reaching high speeds.



SPEEDS

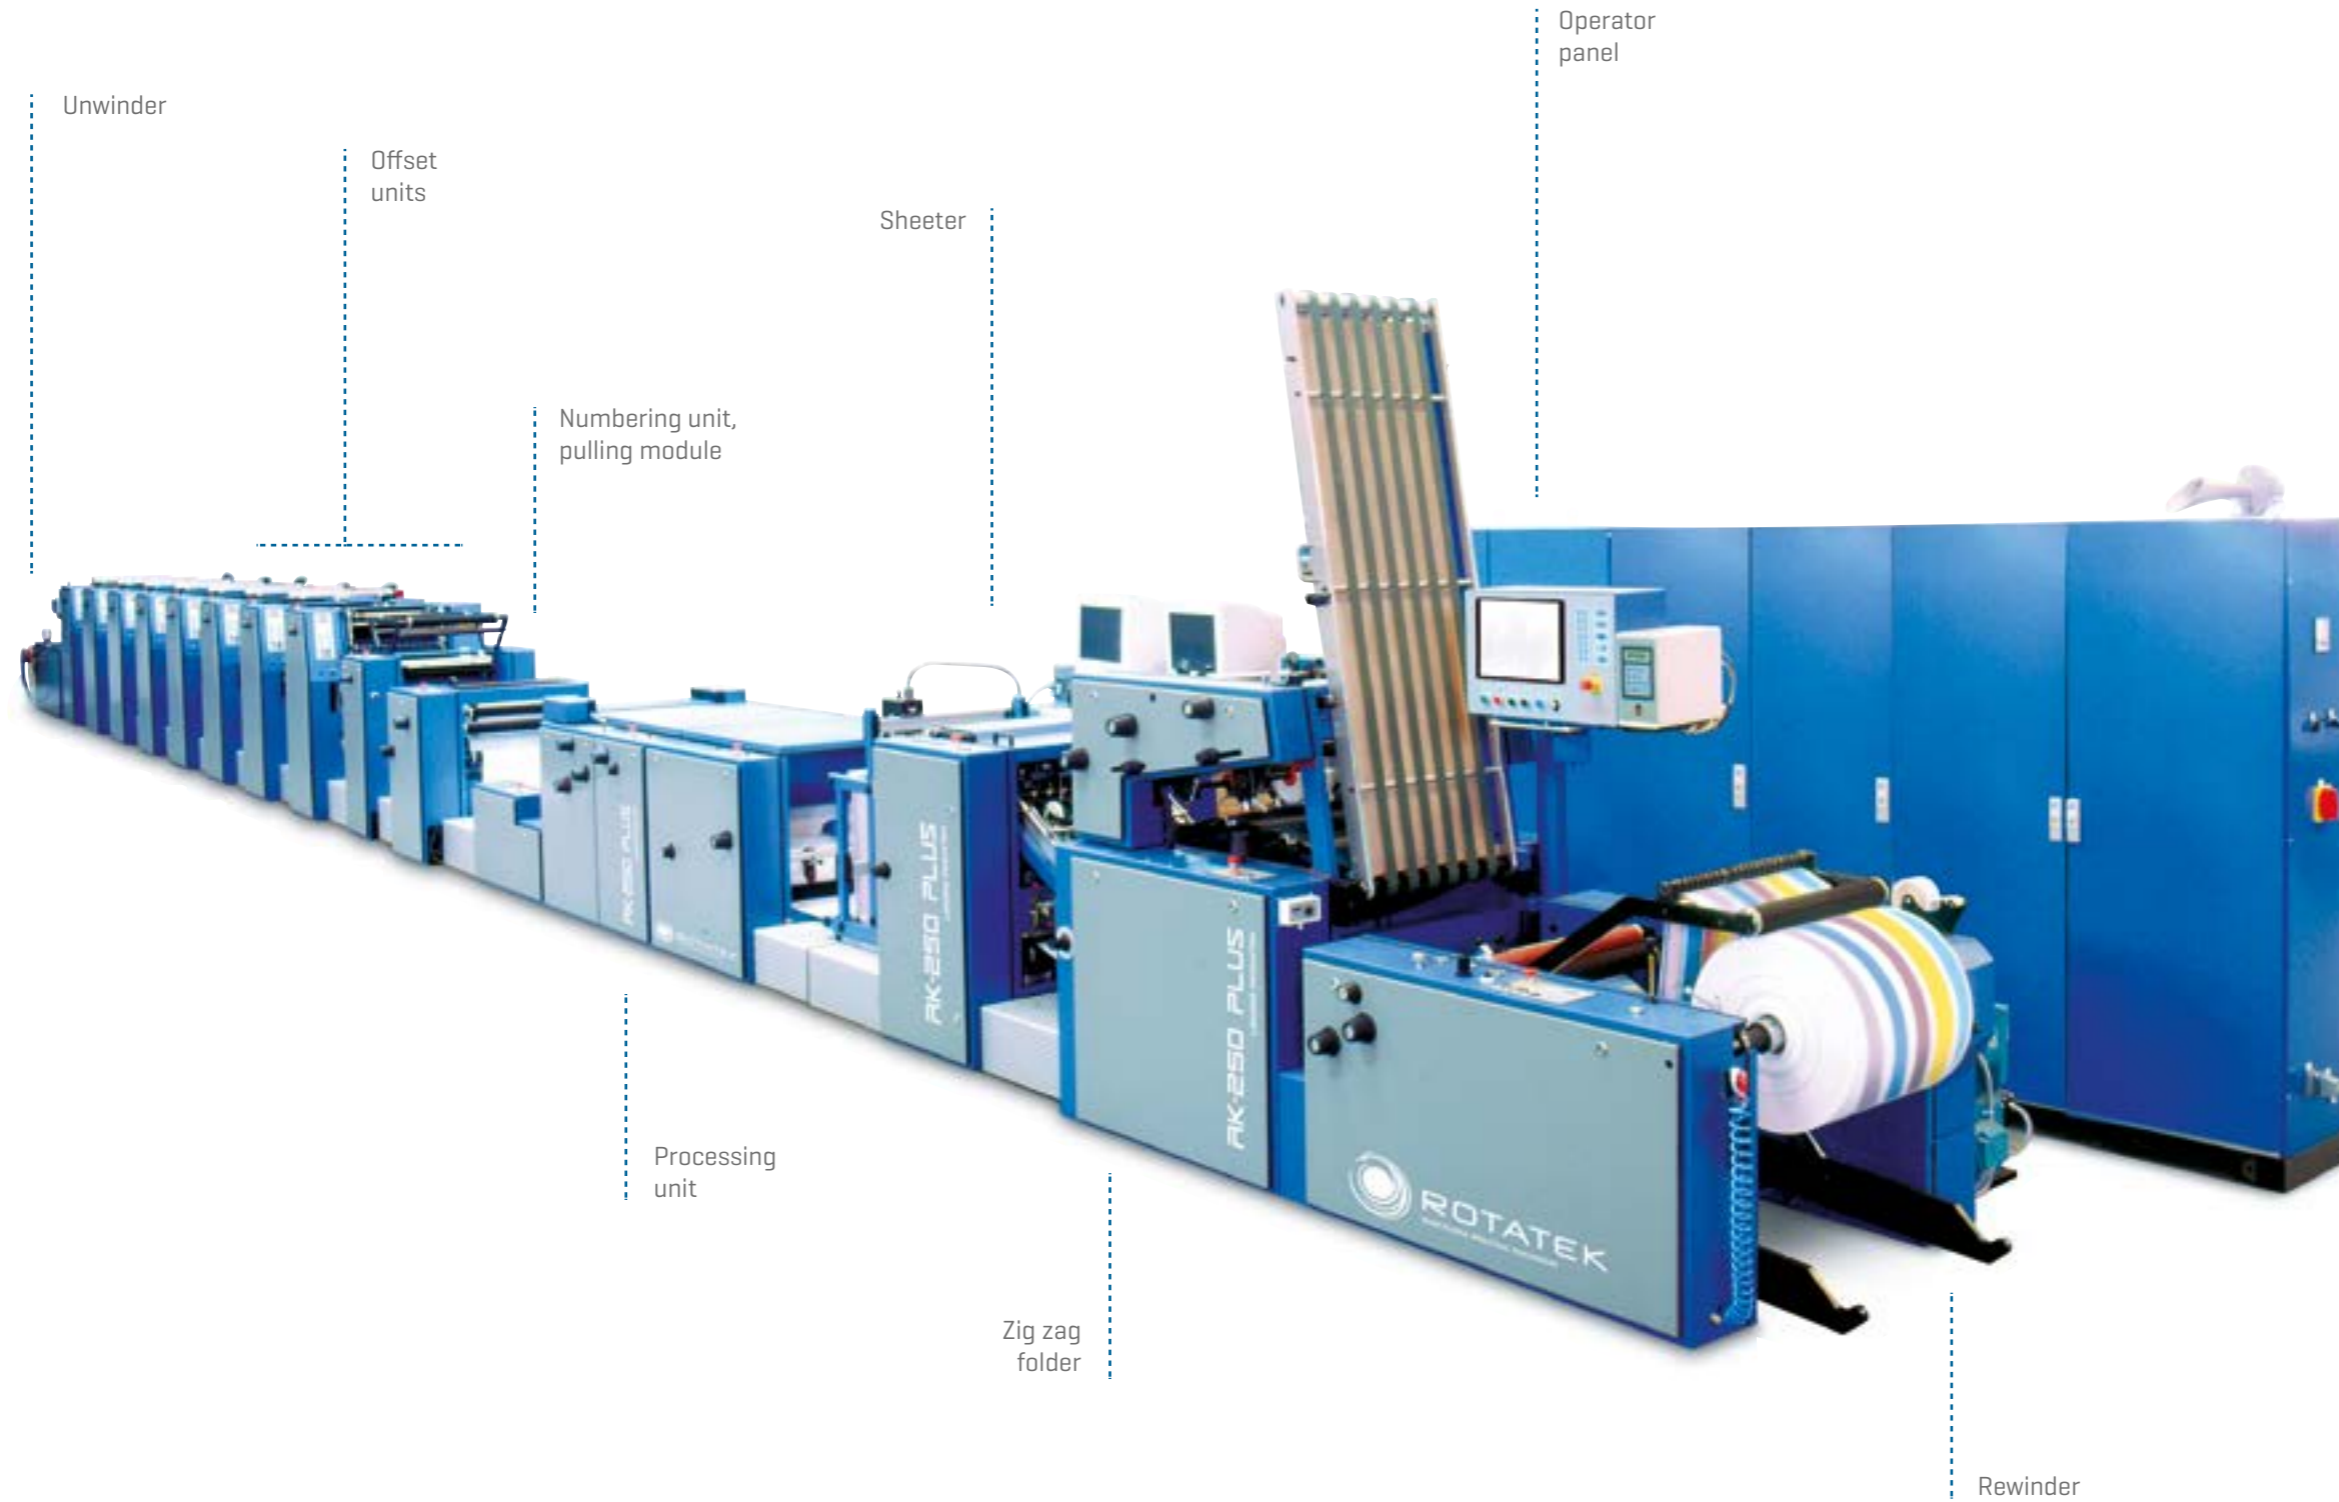

ROTARY

- 250**
m/min Roll to Roll
- 200**
m/min Roll to sheet
- 200**
m/min Roll-Zig zag

WIDTH



Maximum printing width
480 mm

Minimum substrate width
150 mm

Maximum substrate width
500 mm

PRINTING SUBSTRATES:

- Auto-adhesive paper
- Paper 35/180gr x m²
- Folding box
- Aluminium
- Folding carton

RK-250 Plus

Rotary

Printing and finishing

The **RK-250 Plus** Variable Format Rotary Offset Press is purpose-designed for full colour printing, security and commercial documents.

Its high-quality printing, simplicity in the preparation of the work, together with its mechanical speed of 250 m/min, make RK-plus Shaftless the ideal rotary press for print runs of any size.

If you add to this the quick change of format and the offset printing units, with 16 roller batteries, inkwells located at the front, automatic zero positioning and the remote control longitudinal register, you have a versatile and highly productive rotary press, unbeatable for its speed and print quality. Its modular system and wide range of options allow you to set up the press according to the various products required.



ONLINE COMBINATIONS

Additional positions for cross-perforation	Plate Position Corrector
Motorized side register	Ink striker
Automatic washing	Second File Position
Motorized inking system adjustment	Metric Option
Production management system	Battery Reinforcement
Battery Declutch	Die cutting unit with magnetic cylinder
Numbering unit	Batcher/stacker
Letterpress unit	Screen units
Flexographic units	Sheet outfeed
UV / IR / hot air drying	In-jet head
Batteries motorization	

TECHNICAL SPECIFICATIONS

ROTARY SYSTEM

Offset cassettes variables between 11" and 26"	Non-printing zone 3-4 mm with adhesive blankets 8 mm with non-adhesive blankets	Maximum coil diameter 1270 mm
Sheet format variables between 6" and 25"	Plate thickness 0'15 o 0'20 mm with quick fastening system	Shaft Diameter 70 mm
Folding format 5 1/2" to 17"	Blanket thickness 1'05 mm with adhesive blanket	
Printing format 16" to 28"	Maximum rewinder diameter 1270 mm	

APPLICATIONS



Pharmaceutical leaflets

Business forms

Transactional documents

Security documents

MARKETS

Pharmaceutical leaflets



Security



Transactional documents



Commercial printing



**ESPECIALLY DESIGNED FOR FULL COLOR PRINTING.
IT CONTAINS A MODULAR SYSTEM THAT ALLOWS THE PRINTING
OF ANY TYPE OF JOB.**

